

Fiber Optic Connectors



Applications:

- CATV/Access networks
- Telecommunications
- Data communications
- Component termination

Features:

- Connectors Compliance with IEC, JIS, Telcordia(GR-326-CORE) are available
- Low insertions loss
- Small form factor
- Compliance with ROHS
- Wide operating temperature: -40°C - +85°C

Fiber Optic Connectors			
SPECIFICATIONS	SM/PC	SM/APC	MULTIMODE
Insertion Loss (dB)	< 0.3	< 0.3	< 0.3
Return Loss (dB)	50/55	65	-
Durability: 500 mating	0.2dB	0.2dB	0.2dB
Ferrule Type	Standard	Step / Conical	Standard
Body Material	Nickel plated brass		
Boot Type	Variety of colors, Designs available		
Cable Type	0.9 / 2.0 / 2.4 / 3.0 / Zip cable		

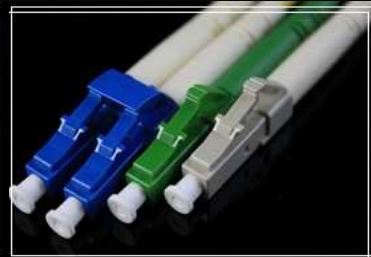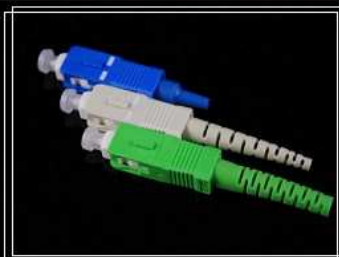

Flanges with different length
For pre-assembling connector

Licensed LC Connector!!!